



CREATES PERMANENT SOLUTIONS

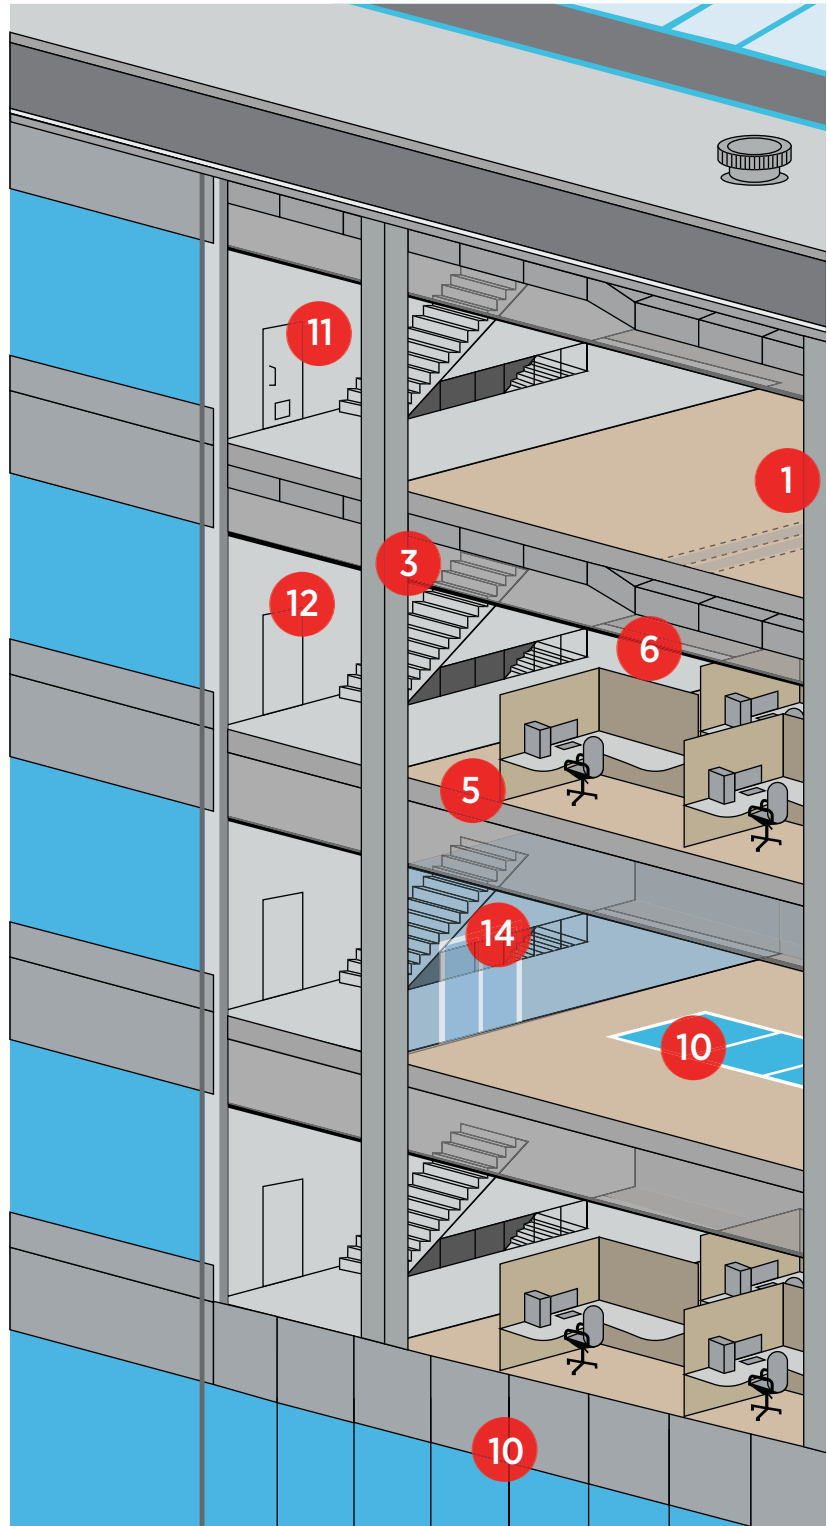

# Fire Rated Products Catalogue

# Akfix® IMPORTANT ASPECTS OF

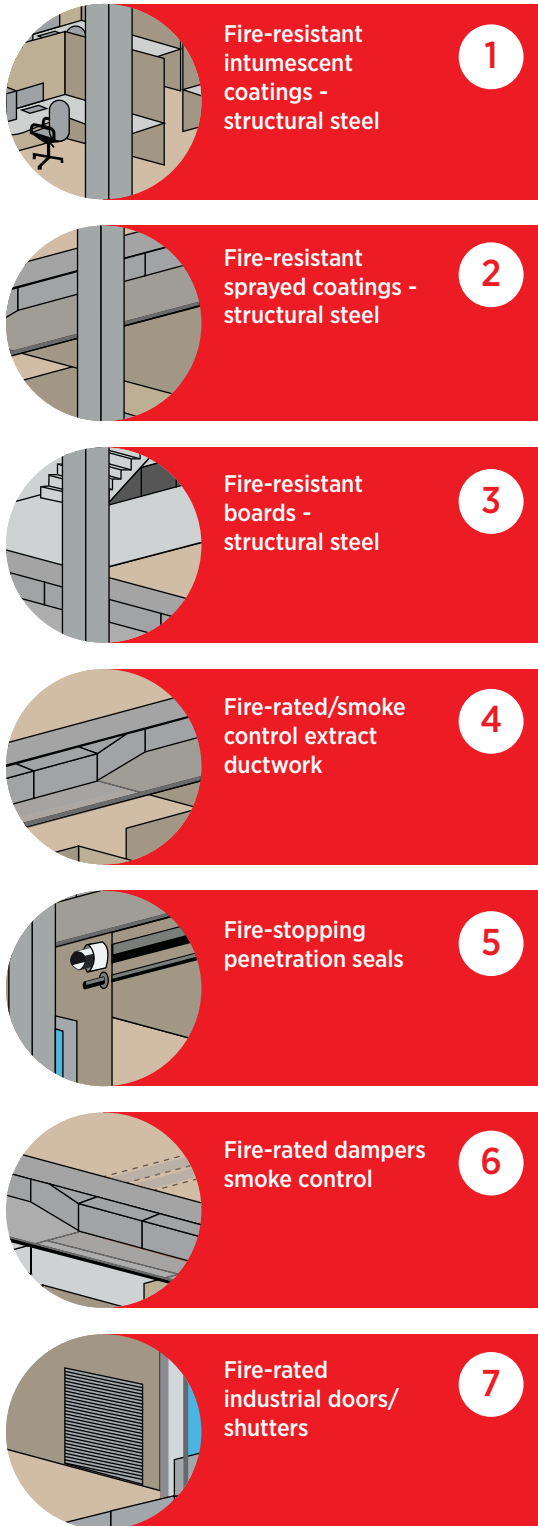


To minimize the loss of life and property in case of fire:

- Detection systems (Smoke detectors)
- Active fire protection systems (sprinkler, fire extinguisher etc.)

- Passive fire protection systems (Fire doors, ventilation ducts, service installations etc.) must be used.

Today; A great importance is given to the quality of these systems and it is a necessity to meet various European or national norms.

# PASSIVE PROTECTION SYSTEMS

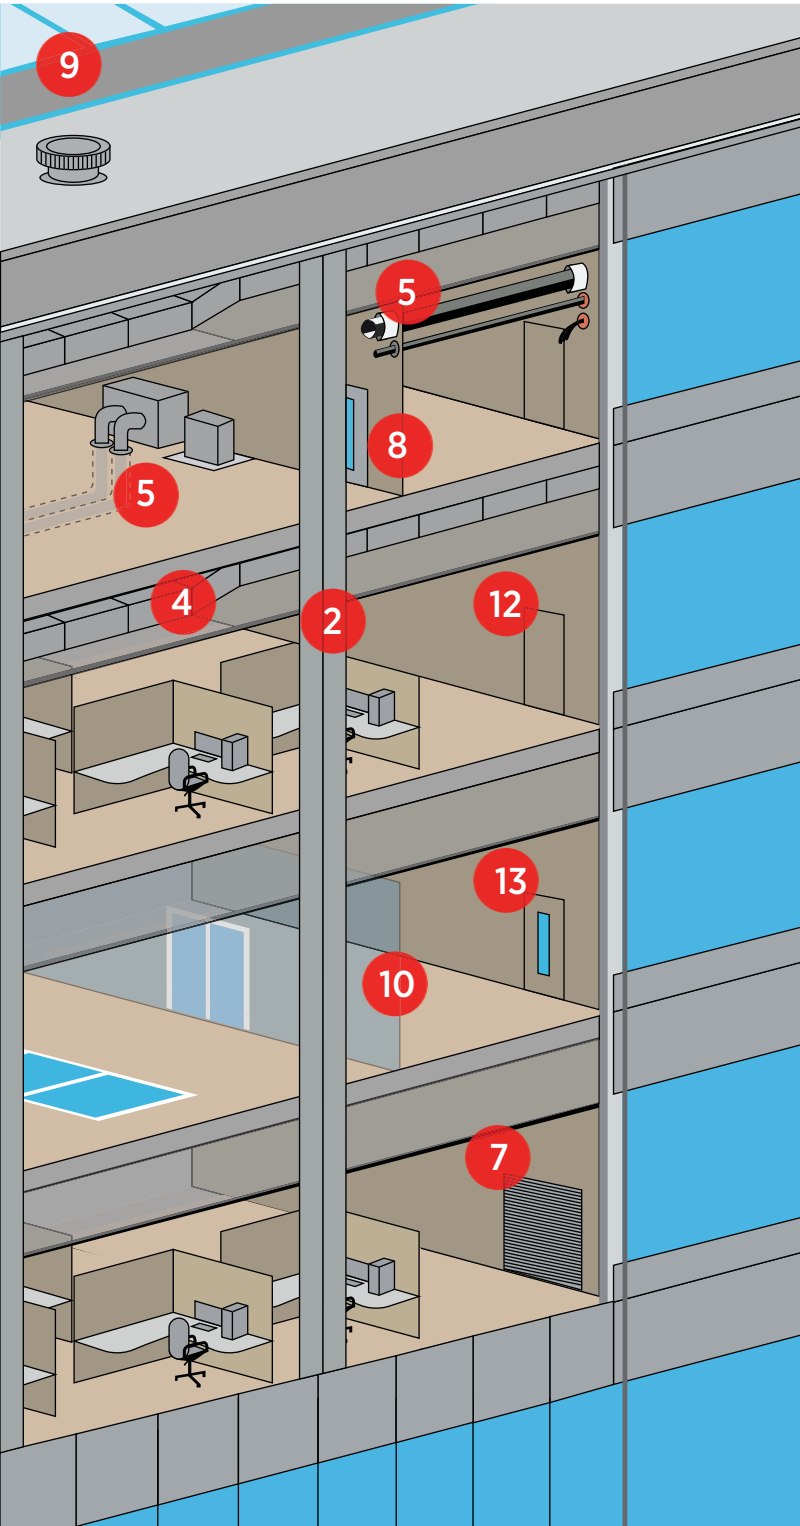

**8** Fire-rated partitions

**9** Fire-resistant roof glazing

**10** Fire resistant glass walls/floors/facades

**11** Fire-resistant building hardware

**12** Fire-resistant and smoke control doors

**13** Fire-resistant glazed doors

**14** Fire-resistant glass doors

Due to our product range, we are targeting passive fire protection systems (passive fire stop systems).

In these systems; our foam and sealants, which is a component of the connection joints, have been tested according to the European standard EN 1366-4, and proven to be superior in performance.

It is legally impossible to use a product that does not have one of these and other similar fire resistance standards (by product type and area of use) in a system called as a passive fire protection system.

creates permanent solutions

## FIRE RATED PRODUCTS

**FIRE RETARDANT  
MORE THAN  
4 HOURS**

**A+ INDOOR  
AIR QUALITY**

**25%  
MOVEMENT  
CAPABILITY**



## FIRE RATED PU SEALANT

A one-component, modular polyurethane sealant that provides all the advantages of an ordinary polyurethane sealant, as well as a high level of fire resistance.

### PROPERTIES

- According to EN 1366-4, provides fire resistance more than 240 minutes in certain conditions without using backfilling materials.
- M2 Fire Rating according to NF P 92-501 radiation test.
- 25% movement capability
- No surface tackiness after the full cure,
- No dirt,
- No shrinkage,
- Does not form bubble,
- Thixotropic,
- Paintable.



**Linear  
Gap Sealing  
Of Fire Rated  
Wall-Partitions**

## APPLICATION AREAS

It is used to provide passive fire resistance in many structures and systems requiring up to 25% mobility, included but not limited to following;

- In construction sector; sealing the joints between building elements,
- At joints of prefabricated building elements,
- Sealing and bonding of ventilation ducts,
- In buildings, it is used to close the joints between precast concrete blocks.

## TECHNICAL FEATURES

### BEFORE CURING

Basis	: Polyurethane	
Consistency	: Thixotropic	
Curing Mechanism	: Moisture Curing	
Density	: 1.20-1,25g/ml	
Tack free time	: 30-60 min.	(23°C and 50% R.H)
Curing Rate	: Min. 2,5 mm/day	(23°C and 50% R.H)
Sagging	: 0 mm	(EN ISO 7390)
Temperature Resistance	: -40°C to +90°C	
Application Temperature	: +5°C to +40°C	

### AFTER CURING

Hardness Shore A	: 35-40 After 28 days	(ASTM C661)
Paintability	: Yes *	
Elastic Recovery	: ≥ 70%	(ISO 7389)

### Glass-Glass

Elongation at break	: ≥ 200% (ISO8339)	
E100 Modulus (23 °C)	: 0.35-0.40 N/mm <sup>2</sup>	(ISO8339)
E100 Modulus (-20 °C)	: ≤ 0,60 N/mm <sup>2</sup>	(ISO8339)

### DUMBLE TEST

Elongation at break	: ≥%600	(ASTM D412)
Tensile Strength	: 1.5-2.0 N/mm <sup>2</sup>	(ASTM D412)



Fire Rated Stairs: Sealing Expansion Joints



Sealing Between Exterior Duct System



Sealing Between The Internal Precast Wall Panels And Ceiling


Test Results –Efectis Era Global; EN 1366-4:2010

Wall Thickness	Joint Measurements	Filling Material	Application	Fire Resistance/ Minutes
200mm	Width: 11 mm Depth: 10+10 mm	None	Double Sided	240 minutes Fire Classification: EI 240
200mm	Width: 21 mm Depth: 10+10 mm	Ceramic Wool	Double Sided	240 minutes Fire Classification: EI 240
100mm	Width: 11 mm Depth: 10+10 mm	None	Double Sided	196 minutes Fire Classification: EI 180
100mm	Width: 21 mm Depth: 10+10 mm	Ceramic Wool	Double Sided	186 minutes Fire Classification: EI 180

## PACKAGE

Stock Code	Type	Volume	Box
AA803	Black	300 ml	12
AA843	Black	400 ml	12
AA863	Black	600 ml	12
AA846	Grey	400 ml	12
AA866	Grey	600 ml	12
AA833	Black	310 ml	12
AA836	Grey	310 ml	12

## CERTIFICATES



El x: Integrity and insulation are not compromised for at least x minutes.

**FIRE RETARDANT  
MORE THAN  
240 mins.**

**A+ INDOOR AIR  
QUALITY**

**INTUMESCENT**



## AC607

### FIRE STOP ACRYLIC SEALANT

A single component water based fire rated acrylic sealant ideal for sealing joints to prevent the passage of flammable gases and toxic smoke in compartment walls and floors. Due to its intumescent properties, it expands volumetrically by releasing water vapor exceeding 120 °C temperatures to reduce heat transfer.

#### PROPERTIES

- According to EN 1366-4, provides fire resistance more than 240 minutes in certain conditions without using backfilling materials.
- M1 Fire Rating according to NF P 92-501 radiation test.
- Good unprimed adhesion to most common construction substrates.
- Remains flexible.
- Paintable.
- Non-slump formula.



**Fire-Stopping  
Penetration Seals**

## APPLICATION AREAS

As stated below, it can be used to provide passive fire resistance in multi structures and systems that can move up to 15%;

- At the expansion points of walls and floors,
- For xing and in between joints of panels and similar structures,
- For the isolation of wood, steel and PVC,
- Mounting decorative materials,
- In steel ducts, ducting, cables and cable ducts.

## TECHNICAL FEATURES

Basis	: Acrylic Dispersion		
Consistency	: Smooth paste		
pH	: 7,5-9		
Specific gravity	: 1,58 ± 0,03 gr/cm <sup>3</sup>	(ASTM D 792)	
Tack-Free time	: 15-30 min (23°C and 50% R.H)	(ASTM C 679-03)	
Curing Rate (mm/day)	: Min.2 mm/day	(23°C and 50% R.H)	
Shore A hardness	: 40 ± 5 Shore A		
Elongation	: > 100%	(ASTM D 412)	
Tensile strength	: ≥ 0,4 N/mm <sup>2</sup>	(ASTM D 412)	
Application Temperature	: +5°C to +40°C		
Volume shrinkage	: %10-15	(ASTM D 412)	



Interior Wall: Fire-Stopping Solution



Penetration Seal Combined With Industrial Shutter



Various Penetration Seal Systems

Test Results –Efectis Era Global; EN 1366-4:2010

Wall Thickness	Joint Measurements	Filling Material	Application	Fire Resistance/ Minutes
200mm	Width: 10 mm Depth: 20+20 mm	None	Double Sided	240 minutes Fire Classification: EI 240
200mm	Width: 20 mm Depth: 20+20 mm	None	Double Sided	240 minutes Fire Classification: EI 240
100mm	Width: 20 mm Depth: 20+20 mm	None	Double Sided	229 minutes* Fire Classification: EI 240
100mm	Width: 10 mm Depth: 20+20 mm	None	Double Sided	229 minutes* Fire Classification: EI 240

EI x: Integrity and insulation are not compromised for at least x minutes.

\*Test has been terminated for the safety concerns.

## PACKAGE

Stock Code	Type	Volume	Box
AA607.5	White	310ml	12
AA607.4	White	400 ml	12
AA607.3	White	600 ml	12
AA701	White	Br. 550 g.	12
AA761	White	600 ml	12

## CERTIFICATES



Fire Class

**FLEXIBLE &  
DURABLE**

**GAS & WATER  
TIGHT**

**SHOCK  
ABSORBING**




# N920

## INTUMESCENT FIRE RATED NEUTRAL SILICONE SEALANT

An graphite containing one-component neutral grade intumescent silicone sealant designed to protect cable entries by forming a gas and watertight seal. Product cures upon exposure to atmospheric humidity. It expands at high temperatures to prevent the passage of smoke and flames.

### PROPERTIES

- Flexible and durable
- Gas and Water tight
- Shows Fire resistance properties.
- Resistant against Water, Alkaline, Chemical agents.
- Non corrosive.
- Solvent free.
- Shock absorbing.
- Quick and easy installation.

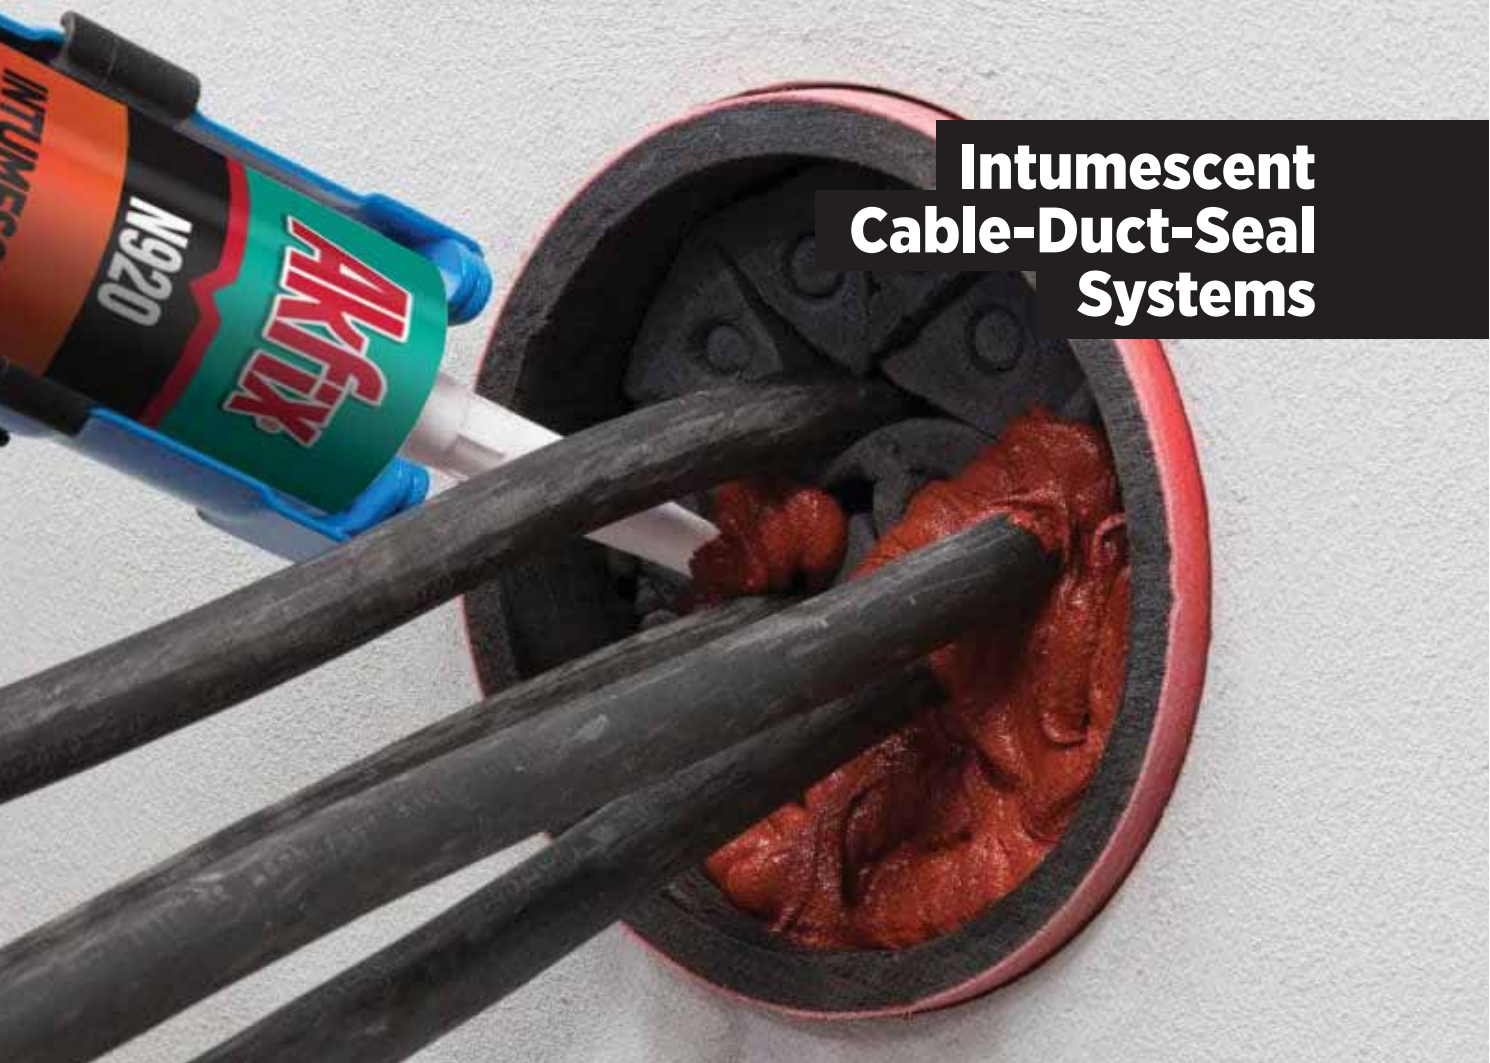

**Intumescent  
Cable-Duct-Seal  
Systems**



## APPLICATION AREAS

- Combustible and non combustible pipes
- Cables ( single cables or bunches of cables)
- Seals all know materials; PVC & PE sheathed cables etc.
- Suitable for any shaped duct
- Suitable for all common building materials.

## TECHNICAL FEATURES

Basis	: Neutral Silicone	
Density	: 1,25 ±0,03gr/cm <sup>3</sup>	(ASTM D 792)
Flow	: 0 mm	(ISO 7390)
Colour	: red-brown-black	
Skin over time	: ± 20 minutes 23°C / 55% R.H.	
Curing	: Min. 3 mm/24h	
Hardness	: 30-35 shore A	
Elongation	: > 100%	(ISO 7389)
Tensile strength	: 1± 0,25 N/mm <sup>2</sup>	(ISO 8339)
Operating temperature	: +5°C to +40°C	
Temperature resistance	: -40°C to +120°C	



Combustible Pipe Sealing



Fire Barrier Around Exterior Duct



Combustible Pipe Sealing

## PACKAGE

Stock Code	Type	Volume	Box
SA093	Black	310 ml	12
SA096	Grey	310 ml	12
SA095	Red	310 ml	12

Reaction to fire classification  
according to EN 13501-1

# B-s1,d0



Hvac Penetration Cable-Pipe Sealing

**FIRE  
RETARDANT**

**ABSORBS  
MOVEMENTS  
25 %**

**WATER,  
WEATHER & UV  
RESISTANT**



# 140F

## FIRE RATED SILICONE SEALANT

A one part, low modulus, neutral cure, halogen free product. It is suitable for the sealing of linear construction joints and around pipe penetrations. It is also ideal for the weathersealing of curtain walling, building facades and expansion joints in fire rated walls.

### PROPERTIES

- Flexible and durable
- Classified as B-s1,d0 according to EN 13501-1:2007+A1:2009
- Water, weather and UV resistant.
- Resistant against Water, Alkaline, Chemical agents.
- Non corrosive.
- Solvent free.
- Air tight sealing.
- Quick and easy installation.



**Fire Resistant  
Curtain Wall Systems**

## APPLICATION AREAS

- Fire resistant sealing of connection and expansion joints in constructions
- All building and glazing joints which require a fire rating.
- Suitable for all common building materials.

## TECHNICAL FEATURES

Basis	: Silicone Polymer (Oxime)	
Density	: 1,20 ± 0,03 g / cm <sup>3</sup>	(ASTM D 792)
Sagging	: 0 mm	(ISO 7390)
Skin over time	: 10 ± 5 dakika	(23°C, 50% R.H.)
Curing Rate	: Min. 3 mm/ 24 sa	(23°C, 50% R.H.)
Hardness	: 30 - 35 shore A	
Elongation at break	: ≥ 100%	(ISO 7389)
Tensile Strength	: 1,5-2,0 N/mm <sup>2</sup>	(ISO 8339)
Application Temperature	: +5°C to +40°C	
Heat Resistance	: -60 °C to +180°C	



Fire Door Interior Sealing



Fire Rated Glass Door



Fire Door Frame Sealing

## PACKAGE

Stock Code	Type	Volume	Box
SAF12	White	310 ml	12
SAF13	White	310 ml	12
SAF16	White	310 ml	12
SAF62	White	600 ml	12
SAF63	White	600 ml	12
SAF66	White	600 ml	12



Fire Rated Board

**FIRE  
RETARDANT  
UP TO 217 MIN**

**EFFICIENT  
SEAL AGAINST  
SMOKE AND GAS**

**EXCELLENT  
ADHESION &  
FILLING CAPACITY**



# 820/820P

## B1 FIRE RATED PU FOAM STRAW / GUN

A moisture curing, one-component, ozone friendly, ready to use polyurethane foam. It is suitable for use in passive fire protection systems as it meets with various fire resistance protocols.

### PROPERTIES

- According to EN 1366-4, provides fire resistance up to 217 minutes in certain conditions without using backfilling materials,
- Provides efficient isolation against gas and smoke,
- CFC and HCFC free,
- Excellent adhesion and filling properties,
- Efficiency up to 45L with Straw type (820) and 65L with Gun type (820P) depending on moisture and temperature,
- No Shrinkage,
- After cured, it can be painted, cut, trimmed.



## Gap Filling In Pipe Penetration Systems

## APPLICATION AREAS

It is used to provide passive fire resistance in many structures and systems, especially those mentioned below;

- Manufacture and installation of fire doors,
- Gaps that are critical to the structure during the fire; filling and sealing of large cracks and holes,
- In the insulation of cables and plugs which will be affected first by fire,
- Bonding of fire-resistant exterior insulation materials.

## TECHNICAL FEATURES

### 820

Basis	: Polyurethane Prepolymer	
Curing System	: Moisture cure	
Specific Gravity	: 22±3 Kg/cm <sup>3</sup>	(ASTM D1622)
Tack-Free Time (1 cm width)	: 7±3 min	(ASTM C1620)
Cutting Time (1cm width)	: 30-45 min	(ASTM C1620)
Cure-Time	: 24 hours	
Foam Colour	: RED	
Yield Volumetric	: 35-45L	(ASTM C1536)
Post Expansion	: 200-250 %	
Shrinkage	: <5%	
Fire Class of the Cured Foam	: B1	(DIN 4102)
Thermal Conductivity	: 0,036 W/m.k (at 20°C)	(DIN 52612)
Compression Strength	: 0,03 MPa	(DIN 53421)
Water Absorption	: Max. 1 vol%	(DIN 53428)
Temperature Resistance	: -40°C to +90°C	
Application Temperature	: +5°C to +30°C	
Can temperature	: +5°C to +30°C	

### 820P

Basis	: Polyurethane Prepolymer	
Curing System	: Moisture cure	
Specific Gravity	: 19±3 Kg/cm <sup>3</sup>	(ASTM D1622)
Tack-Free Time (1 cm width)	: 7±3 min	(ASTM C1620)
Cutting Time (1cm width)	: 30-45 min	(ASTM C1620)
Cure-Time	: 24 hours	
Foam Colour	: RED	
Yield Volumetric	: 55-65L	(ASTM C1536)
Post Expansion	: up to 30%	
Shrinkage	: <5%	
Fire Class of the Cured Foam	: B1	(DIN 4102)
Thermal Conductivity	: 0,036 W/m.k (at 20°C)	(DIN 52612)
Compression Strength	: 0,03 MPa	(DIN 53421)
Water Absorption	: Max. 1 vol%	(DIN 53428)
Temperature Resistance	: -40°C to +90°C	
Application Temperature	: +5°C to +30°C	
Can temperature	: +5°C to +30°C	



Gap Filling In Duct And Cable Penetration Systems



Cable Insulation


Test Results -Efectis Era Global; EN 1366-4:2010

Wall Thickness	Joint Measurements	Filling Material	Fire Resistance/ Minutes
<b>200mm</b>	Width: 11 mm Depth: 200 mm	None	217 minutes Fire Classification: EI 180
<b>200mm</b>	Width: 31 mm Depth: 200 mm	None	147 minutes Fire Classification: EI 120
<b>100mm</b>	Width: 21 mm Depth: 100 mm	None	64 minutes Fire Classification: EI 60
<b>100mm</b>	Width: 11 mm Depth: 100 mm	None	80 minutes Fire Classification: EI 60

## PACKAGE

Stock Code	Type	Volume	Box
(820P) FA025	Summer +5	Gw. 1000 g.	12
(820) FA015	Summer +5	Gw. 1000 g.	12

## CERTIFICATES



## FIRE RATED PRODUCTS

**RATED B2  
ACCORDING TO  
DIN 4102**

**EXCELLENT  
ADHESION TO MOST  
BUILDING MATERIALS**

**VERY GOOD  
FILLING  
CAPACITY**



# 840/840P

## B2 FIRE RATED PU FOAM STRAW / GUN

A self-extinguishable multi-purpose polyurethane foam which provides moderate fire safety. It is designed for easy dispensing through the straw adapter included to each can.

### PROPERTIES

- Provides moderate fire safety,
- High metric yield and reusability,
- Excellent adhesion & filling capacity,
- Economical consumption thanks to precise application,
- Conforms to fire class B2 according to DIN 4102-1,
- Efficiency up to 45L with Straw type (840) and 55L with Gun type (840P) depending on moisture and temperature,
- Mould-proof, water-proof and over paintable.



## Insulation Of Fire-Door Frames

## APPLICATION AREAS

- Insulating electrical outlets and water pipes
- Fixing and insulating of door and window frames.
- Filling and sealing of gaps, joints and cavities.
- Filling of penetrations in walls.

## TECHNICAL FEATURES

### 840


Basis	: Polyurethane Prepolymer	
Curing System	: Moisture cure	
Specific Gravity	: 22±3 Kg/ cm <sup>3</sup>	(ASTM D1622)
Tack-Free Time (1 cm width)	: 6±2 min	(ASTM C1620)
Cutting Time (1cm width)	: 20-45 min	(ASTM C1620)
Cure-Time	: 24 hours	
Foam Colour	: Light red	
Yield	: 40-45 L	(ASTM C1536)
Fire Class of the Cured Foam	: B2	(DIN 4102)
Thermal Conductivity	: 0,036 W/m.k (at 20°C)	(DIN 52612)
Compression Strength	: 0,03 MPa	(DIN 53421)
Water Absorption	: max. 1 vol%	(DIN 53428)
Can Temperature	: min.5°C max. +30°C	
Temperature Resistance	: -40°C to +90°C	
Application Temperature	: +5°C to +30°C	

### 840P

Basis	: Polyurethane Prepolymer	
Curing System	: Moisture cure	
Specific Gravity	: 19±3 Kg/ cm <sup>3</sup>	(ASTM D1622)
Tack-Free Time (1 cm width)	: 6±2 min	(ASTM C1620)
Cutting Time (1cm width)	: 20-45 min	(ASTM C1620)
Cure-Time	: 24 hours	
Foam Colour	: Light red	
Yield	: 45-55 L	(ASTM C1536)
Fire Class of the Cured Foam	: B2	(DIN 4102)
Thermal Conductivity	: 0,036 W/m.k (at 20°C)	(DIN 52612)
Compression Strength	: 0,03 MPa	(DIN 53421)
Water Absorption	: max. 1 vol% (DIN 53428)	
Can Temperature	: min.5°C max. +30°C	
Temperature Resistance	: -40°C to +90°C	
Application Temperature	: +5°C to +30°C	

Test No.		1	2	3	4	5	6	7	8	
Exposure conditions*		F			K					
Thickness	mm	10	30	10	30					
Ignition	s	immediately								
Max. flame height										
within 20 s	cm	11	11	9	12	12	11	12	12	
reached after	s	6	6	9	5	4	7	2	8	
Measuring-mark reached after	s	-	-	-	-	-	-	-	-	
Flames extinguished after:	s	15	15	15	15	15	15	15	15	
Smoke development:		very high								
Filter paper ignited after:	s	-	-	-	-	-	-	-	-	

\* K = edge exposure; F = surface exposure

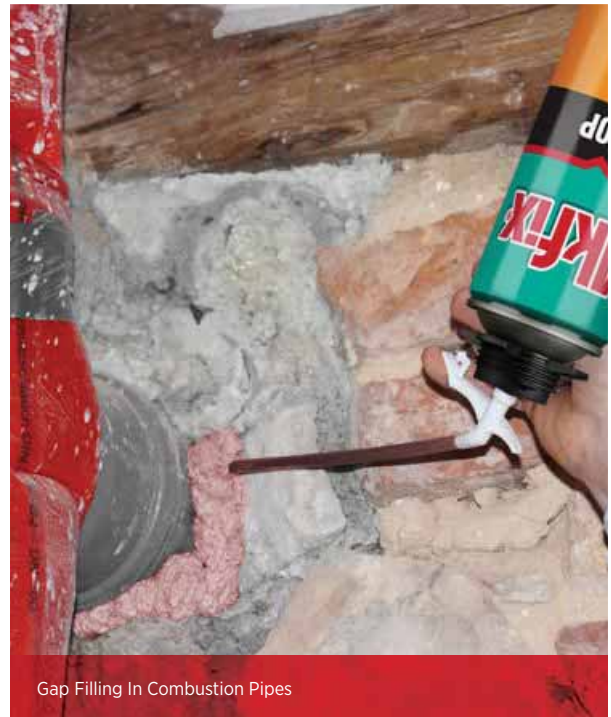

Gap Filling In Combustion Pipes



Insulation Of Gas Pipes

## PACKAGE

Stock Code	Type	Volume	Box
(840) SAF12	Summer +5	Gw. 900 g.	12
(840P) SAF13	Summer +5	Gw. 900 g.	12

## CERTIFICATES



Fire Class



# Akfix®

■ MASTER OF SOLUTIONS ■

    /Akfixsealants



CREATES PERMANENT SOLUTIONS